




# LOex Sens-Inox Tonga2 T91S

Electronic self-closing pillar tap, swivel spout, single-pipe inlet for cold or pre-mixed water or with UT-mixture according to EU-RL, HACCP, LMHV.

## Installation version DMK

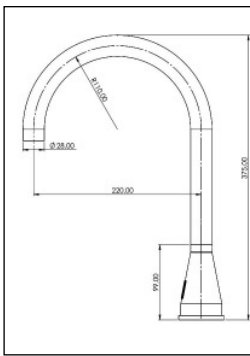

### Tendertext

Non-contact self-closing DN 15  
Washtable-tap, stainless steel satin;  
with rotating and lockable curved spout,  
aerator\*, optosensor.  
For premixed water (UT mixer).  
Electronically controlled - with integra-  
ted electronics (Donau/E8A,  
Weser/E9A).

- rotatable and lockable (Fig.) ii  
Outreach 220 mm  
Height of outlet opening from WT 236 mm  
Total height from WT 375 mm

### Operating version/ EAN-Number

### article-number

for 12V low-voltage mains operation -

- integrated electronic "LOex Donau", **B**  
- external plug-in power supply unit - 12VDC

40 34154 02313 0 TG2SE8AST91ii22 5\_DMK

- integrated electronic "LOex Donau", **C**  
- external Meanwelltransformer - 12VDC

40 34154 02314 7 TG2SE8ALT91ii22 5\_DMK

\*Economy jet regulator up to < 6 ltr/min  
a.A. against surcharge.

### for Battery-operated - 6VDC

- integrated electronic "LOex Weser", **E**  
- external batterycontainer(for 4x1,5 AA-batteries)

40 34154 02316 1 TG2SE9ABT91ii22 5\_DMK



### Alternatives in powder coating

Surcharge u.r., no minimum order quantity.

Signalred matt RAL 3001  
Jetblack matt RAL 9005  
Light Grey matt RAL 7035

Shades of colour in adjacent illustrations are not  
binding.

### Optional -

### Remote control for sensor controls in direct current (DC)

For adapting electronic parameters and activating  
legionella flushing  
- for LOex Donau and LOex Weser electronics -

40 34154 01393 3 Zb 073



plugadaptor for LOex Donau 12VDC

**B**



Meanwell-transformer for LOex Donau 12VDC

**C**

IP67; mains plug cable; IP68-connector  
Velcro or screw fastening



Batterycontainer  
for 4x1,5V AA-Alkalibatteries, IP68-connector  
Velcro or screw fastening

**E**



DMK-Mixer-Modul-Set  
solenoid-valve  
Mixing by  
DMK mixer for direct mounting  
on angle-valve  
with integrated checkvalves WC/WH  
accessfilter f. angle-valve  
Connecting flexhose to WH-angle-valve  
angle-valve(on-site)

Tapsocket -  
- rotateable and lockable (ii)  
Basisdiameter 59,5 mm  
Tap hole diameter 35 mm  
Quick fixing for panel thicknesses up to appr. 50 mm

Supply lines-  
Flexhose 3/8"cn ca. 500 mm  
E8/E9 cable to source of energy ca. 800 mm  
cable to solenoid-valve ca. 500 mm

Also adaptable for pressure-less usage.

Also for de-mineralised water  
with electronic  
LOex Donau E8/24VDC and  
24VDC-solenoid-valve in stainless-steel.

Self-closing wash-table tap DN 15, stainless steel (AISI304L) matt  
brushed; electronically controlled, with single-pipe inlet for premixed  
water; with rotatable and lockable spouts, jet regulator.  
Activated by the optosensor integrated into the fitting.

The electronic control systems -

- tap-integrated -

- LOex Donau[E8A] (12VDC, 9 W),

- LOex Weser[E9A] (6VDC, 2 W) -

Default programm, optional remote for activating legionella flushing  
and for adapting range, running times/intervals.

- Sources of energy -

- plugadaptors(12VDCwith IP68-connector. cable-adaptor

- MWTrafo 12VDC, IP67 with powercord and IP68-connector

- Batterycontainer for 4x1,5V AA-Alkalibatteries

Solenoid-valves -

- mono-stabile 12VAC/DC, 2x3/8"m, Faston - for LOex Donau, Rhein

- bi-stabile 6VDC, 2x3/8"m, Faston - for LOex Weser

Flowrate ca. 19 Ltrs/min/3bar FD. Min. Flowpressure ca. 0,3bar.

Mech. Pre-mixer (brass, chrome-plated) with RüVe (WW/KW) for  
direct mounting (DMK) on angle valve, connecting hose to angle valve.  
Filter inserts for 3/8" angle valves enclosed.

Typ: **LOex Tonga2**

Subject to technical and price changes  
without prior notice. This offer is sub-  
ject to change.  
Our terms and conditions of sale and  
delivery apply exclusively.  
Status Nov 205

Previous offers have lost their validity.  
Pricing: €/p.unit; ex warehouse, pac-  
ked; net.

Delivery dates on request.

Place of jurisdiction for registered tra-  
ders and persons under civil law:  
Frankfurt/M.

Scope of delivery: Fitting as described,  
ready for installation, complete.

EU-USID: DE111985600



LOTZ Exim Trading

Sensortechnik für Küchen-, Catering-,  
Labor- und Sanitärbereiche.

Es gibt nur wenig, was sich so bezahlt macht.-  
Für Sie und unsere Umwelt!