




LOex Sens-Inox Tonga2 T91S

Electronic self-closing pillar tap, swivel spout, single-pipe inlet for cold or pre-mixed water or with UT-mixture according to EU-RL, HACCP, LMHV.

Installation version DMK

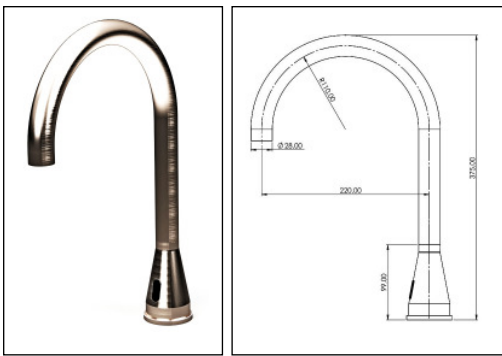

Tendertext
 Non-contact self-closing DN 15
 Washable-tap, stainless steel satin;
 with rotating and lockable curved spout,
 aerator*, optosensor.
 For premixed water (UT mixer).
 Electronically controlled - with external
 (Rhein/E7A) or integrated electronics
 (Donau/E8A, Weser/E9A).
 - rotatable and lockable (Fig.) ii
 Outreach 220 mm
 Height of outlet opening from WT 236 mm
 Total height from WT 375 mm

Operating version/ EAN-Number	article-number
for 12V low-voltage mains operation -	
- External electronics box "LOex Rhein", - integrated transformer - 12VAC	A
40 34154 02082 5	TG2SE7AT91ii22A5_DMK
- integrated electronic "LOex Donau", - external plug-in power supply unit - 12VDC	B
40 34154 02313 0	TG2SE8AST91ii22 5_DMK
- integrated electronic "LOex Donau", - external Meanwelltransformer - 12VDC	C
40 34154 02314 7	TG2SE8ALT91ii22 5_DMK
for 6VDC low-voltage mains operation -	
- integrated electronic "LOex Weser", - external plug-in power supply unit 6VDC	D
40 34154 02315 4	TG2SE9AST91ii22 5_DMK
for Battery-operated - 6VDC	
- integrated electronic "LOex Weser", - external batterycontainer(for 4x1,5 AA-batteries)	E
40 34154 02316 1	TG2SE9ABT91ii22 5_DMK

*Economy jet regulator up to < 6 ltr/min
 a.A. against surcharge.



Alternatives in powder coating
 Surcharge u.r., no minimum order quantity.

Signalred matt	RAL 3001
Jetblack matt	RAL 9005
Light Grey matt	RAL 7035

Shades of colour in adjacent illustrations are not binding.


Optional -



**Remote control for sensor controls
 in direct current (DC)**
 For adapting electronic parameters and activating
 legionella flushing
 - for LOex Donau and LOex Weser electronics -

40 34154 01393 3 Zb 073

	Electronicbox LOex Rhein 12VAC 94x94x56 mm integrated transformer, powercord	A
	plugadaptor for LOex Donau 12VDC plugadaptor for LOex Weser 6VDC IP68-connector	B D
	Meanwell-transformer for LOex Donau 12VDC IP67; mains plug cable; IP68-connector Velcro or screw fastening	C
	Batterycontainer for 4x1,5V AA-Alkalibatteries, IP68-connector Velcro or screw fastening	E

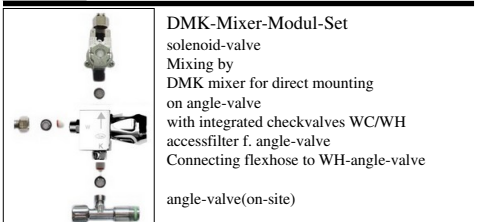

DMK-Mixer-Modul-Set
 solenoid-valve
 Mixing by
 DMK mixer for direct mounting
 on angle-valve
 with integrated checkvalves WC/WH
 accessfilter f. angle-valve
 Connecting flexhose to WH-angle-valve
 angle-valve(on-site)

Also adaptable for pressure-less usage.

Also for de-mineralised water
 with electronic
 LOex Donau E8/24VDC and
 24VDC-solenoid-valve in stainless-steel.

Self-closing wash-table tap DN 15, stainless steel (AISI304L) matt brushed; electronically controlled, with single-pipe inlet for premixed water; with rotatable and lockable spouts, jet regulator. Activated by the optosensor integrated into the fitting.
 The electronic control systems -
tap-integrated -
 - LOex Donau[E8A] (12VDC, 9 W),
 - LOex Weser[E9A] (6VDC, 2 W) -
 Default program, optional remote for activating legionella flushing and for adapting range, running times/intervals.
 - Sources of energy -
 - plugadaptors(12VDC resp. 6VDC)with IP68-connector
 - MWTrafo 12VDC, IP67 with powercord and IP68-connector
 - Batterycontainer for 4x1,5V AA-Alkalibatteries
Extern of tap -
 - LOex Rhein [E7A] with integrated transformer 12VAC_5,6 VA.
 Box PVC 94x94x56mm in IP 65, with integrated transformer; powercord with plug; Operating default-system, reach-adaptor, 2-f. safety-switch-off; Mechanically switchable automatic legionella-flush.
Solenoid-valves -
 - mono-stabile 12VAC/DC, 2x3/8"m, Faston - for LOex Donau, Rhein
 - bi-stabile 6VDC, 2x3/8"m, Faston - for LOex Weser
 Flowrate ca. 19 Ltrs/min/3bar FD. Min. Flowpressure ca. 0,3bar.
Mech. Pre-mixer (brass, chrome-plated) with RüVe (WW/KW) for direct mounting (DMK) on angle valve, connecting hose to angle valve. Filter inserts for 3/8" angle valves enclosed.
 Typ: **LOex Tonga2**

Subject to technical and price changes without prior notice. This offer is subject to change.
 Our terms and conditions of sale and delivery apply exclusively.
 Status May 2023

Previous offers have lost their validity.
 Pricing: €/p.unit; ex warehouse, packed; net.

Delivery dates on request.

Place of jurisdiction for registered traders and persons under civil law: Frankfurt/M.

Scope of delivery: Fitting as described, ready for installation, complete.

EU-USID: DE111985600



LOTZ Exim Trading
 Sensortechnik für Küchen-, Catering-,
 Labor- und Sanitärbereiche.

*Es gibt nur wenig, was sich so bezahlt macht -
 - Für Sie und unsere Umwelt !*